


1394 6P MALE

1394 4P MALE

PIN ASSIGNMENT

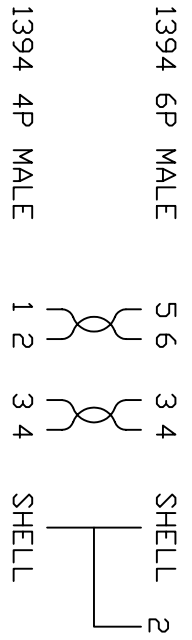


5	1394 4P MALE SOLDER MOLDED TYPE	PCS	1
4	PVC MOLDED FOIL COPPER BLACK IN COLOR		
3	CABLE:UL20276 (1P*30AWG+AL+S+P)*2PCS+M+B DD4.8 BLACK IN COLOR		
2	PVC MOLDED FOIL COPPER BLACK IN COLOR		
1	1394 6P MALE SOLDER MOLDED TYPE	PCS	1
NO.	DESCRIPTION	UNIT	QTY
A	1394 4P MALE/1394 6P MALE MOLDED		
REV.	DESCRIPTION	DATE	

ELECTRONIC TEST:  
 1.OPEN/SHORT/INTERMITTE:100%.  
 2.INSULATION RESISTANCE:20MΩ.  
 3.CONTACT RESISTANCE:3Ω.  
 4.HI-PDT:300V DTAGE.

UNLESS OTHERWISE SPECIFIED TOLERANCE  
 ANG: AS  
 0, ±0.5  
 .00 ±0.2

SCALE: NONE UNIT: mm  
 DRAWN ERIC XU 06/01/12  
 CHECKED



DUN CHENG TECH. CORP.  
 TEL:886-2-26739970 FAX:886-2-26739980  
 DRAWN NAME: 1394-4M6M-300

APPROVED  
 SIZE A4 REV. A  
 FILE NAME: