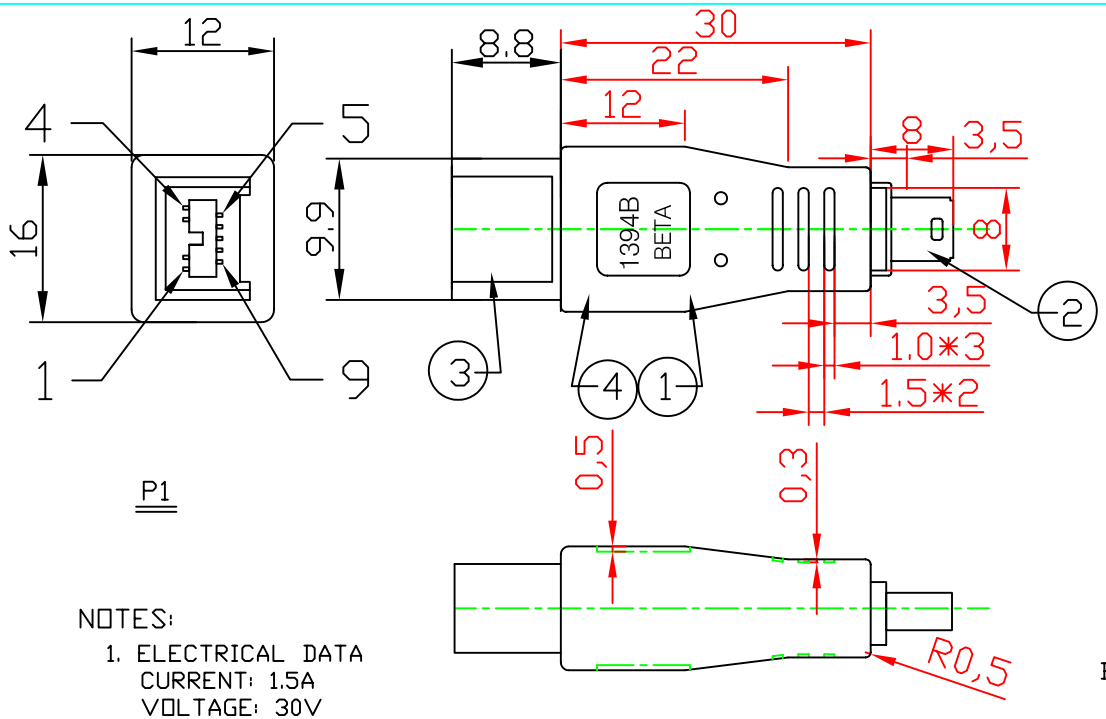

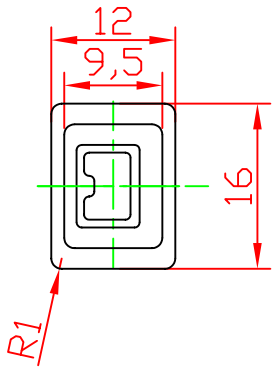

LOGO

1394B
BETA

P1

P2

NOTES:

1. ELECTRICAL DATA
   CURRENT: 1.5A
   VOLTAGE: 30V
   CONTACT RESISTANCE: 50MΩ
   DIELECTRIC WITHSTAND: 100VDC
   INSULATION RESISTANCE: 100MΩ MIN.
2. PHYSICAL DATA
   HOUSING: BLACK GLASS FILLED 4/6 NYLON,UL94V-0
   CONTACTS: PHOSPHOR BRONZE
   PLATING: TIN/LEAD OVER NICKEL IN WIRE TERMINATION AREA
   NICKEL UNDERPLATE ALL OVER.
   PLATING ON MATING AREA PER PART NUMBER BREAKDOWN.
   METAL SHELL: STEEL TIN/LEAD OVER NICKEL PLATING
   TEMPERATURE: -40°C TO +85°C OPERATING
   -40°C TO +105°C STORAGE
3. CABLE ASSEMBLY DESIGNED TO MEET THE ELECTRICAL, MECHANICAL AND ENVIRONMENTAL REQUIREMENTS OF THE IEEE-1394b SPECIFICATION.
4. ADAPTER COLOR: BLACK

PIN ASSIGNMENT

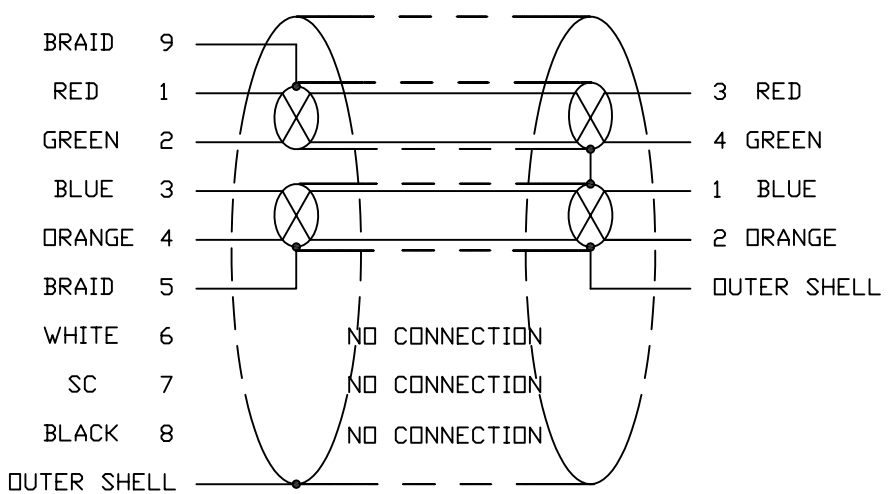

NO.	DESCRIPTION	Q'TY
1	UL1007 30 AWG JUMPER WIRE	6PCS
2	1394 4P MALE ASS'Y PLACK PASTERN	1SET
3	1394 9P BETA BLACK PASTERN CONNECTOR(OUTSIDE COVER: BLACK)	1SET
4	PVC 55P BLACK COLOR	

REV.	DESCRIPTION	DATE
A	ADAPTER IEEE-1394B 9M WIRE BETA TO 4M WIRE	06/09/03

UNLESS OTHERWISE SPECIFIED TOLERANCE
ANG. ±5°
0. ±0.5
.0 ±0.3
.00 ±0.2

SCALE: 1:1 UNIT: mm

DRAWN Merry_Pang 06/09/03

CHECKED

APPROVED

SIZE A4 REV. A

DUN CHENG TECH. CORP.,
TEL:886-2-26739970 FAX:886-2-26739980

DRAWN NAME: ADP-1394B-9BA4M

PRODUCT NO. ADP-1394B-9BA4M

FILE NAME: ADP-1394B-9BA4M