

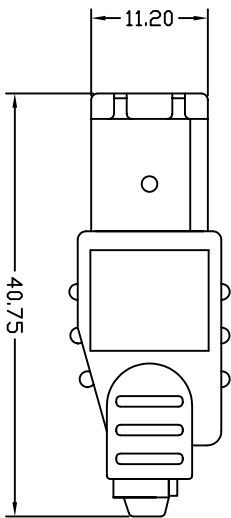
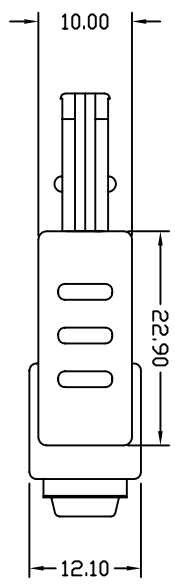


1394 6P MALE

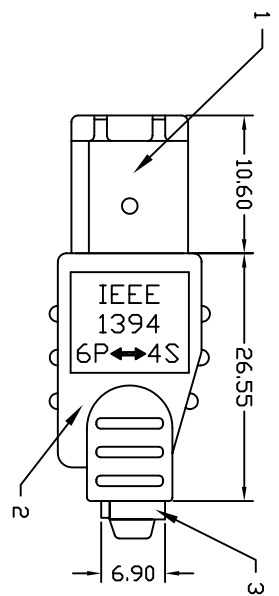

1394 4P FEMALE

1394 6P MALE 5 6 3 4 SHELL

1394 4P FEMALE 1 2 3 4 SHELL

ELECTRONIC TEST:

1. OPEN/SHORT/INTERMITTENCE: 100%.
2. INSULATION RESISTANCE: 10MΩ.
3. CONTACT RESISTANCE: 100Ω.
4. THE WIRES THAT THEY ARE SOLDERED IN THE PIN #5 AND #6 OF THE 1394 6P MALE ARE THROUGH THE CORE.

6	INTERNAL PCB:BOARD:11.20MM*13.20MM*1.00MM PCB FOR 1394 4P FEMALE SMT	PCS	1
5	INTERNAL WIRE:UL1007 30AWG 7 STRAND L:1.7MM	PCS	4
4	CORE:F18R1D6.4mm*3.2mm*3.5mm	PCS	1
3	1394 4P TYPE FEMALE SMT INSULATION:BLACK IN COLOR	PCS	1
2	PVC MOLDED WITH COPPER FOIL BEIGE IN COLOR		
1	1394 6P TYPE MALE INSULATION:BLACK IN COLOR	PCS	1
ND.	DESCRIPTION	UNIT	QTY

TOLERANCE		SELECT	
DN	TOL	1	2
0.00	+/- 0.02	0.05	0.10
0.00	+/- 0.05	0.10	0.15
0.00	+/- 0.10	0.15	0.20
0	+/- 0.05	0.20	0.100
0	+/- 0.10	0.10	0.15

ANGLE: 10° 10° 15°

MATERIAL:

REV.	A	ADP-1394-4F6M	IEEE ADAPTER	IEEE 1394 ADAPTER 4PIN FEMALE TO 6PIN MALE MOLDED	07/03/01	DATE	SIZE	A4	REV.	A	FILE NAME:	ADP-1394-4F6M
			DESCRIPTION									

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANG: ±0.5
±0.3
±0.2

SCALE: 1:1

DRAWN: MICHAEL 07/03/01

CHECKED: HENRY 07/03/01

APPROVED: JIMMY 07/03/01

UNIT: mm

PRODUCT NO: ADP-1394-4F6M

DRAWN NAME: ADP-1394-4F6M



DUN CHENG TECH CORP.
TEL: 886-2-26739970 FAX: 886-2-26739980