



HDMI F- HDMI F

ELECTRICAL TEST:



1. CUITTENT RATING: DC 0.5A
2. WITHSTANDING VOLTAGE: DC 300VDC
3. INSULATION RESISTANCE: 50Mohm
4. CONDUCTIVE RESISTANCE: 2ohm

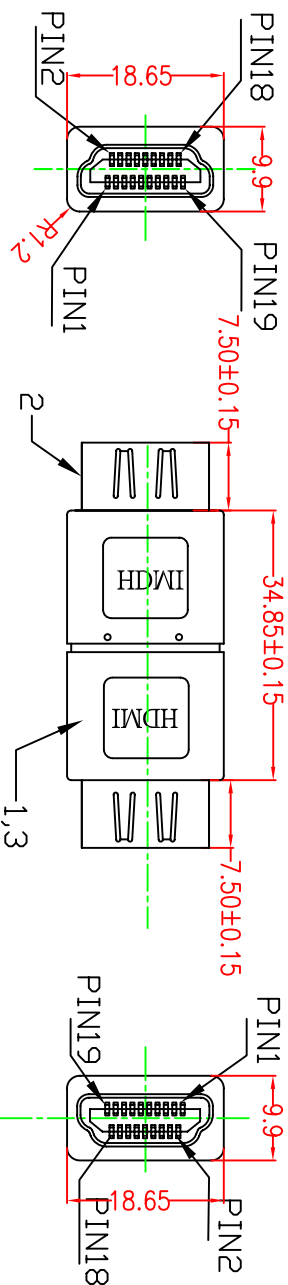

HDMI 19P FEMALE



HDMI 19P FEMALE

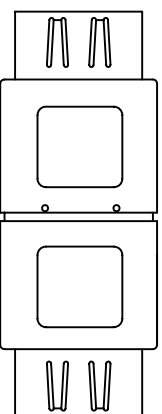

HDMI 19F	HDMI 19F
3	3
1	1
2	2
6	6
4	4
5	5
9	9
7	7
8	8
12	12
10	10
11	11
18	18
17	17
15	15
16	16
19	19
13	13
14	14
SHELL	SHELL

3	OUTTER MOLD PVC 55% :BLACK IN COLDR	PCS	1
2	HDMI A 19P FEMALE SOLDER TYPE CONTACT GOLD FLASH SHELL PLATED NICKEL	PCS	2
1	UL1007 30AWG STRANDEDx7 SCM	PCS	20
No.	DESCRIPTION	UNIT	Q'TY
A	ADAPTER HDMI A-TYPE FEMALE TO FEMALE		
REV.	DESCRIPTION	DATE	

06/07/26	APPROVED	SIZE	REV.	FILE NAME:
		A4	A	ADP-HDMI-FF
UNLESS OTHERWISE SPECIFIED TOLERANCE		DUN CHENG TECH. CORP.		
ANG:	±0.5	TEL:886-2-26739970 FAX:886-2-26739980		
±0.3	±0.2	DRAWN NAME:		
±0.1		06/07/26		
SCALE: NONE	UNIT: mm	ADP-HDMI-FF-MOLD		
DRAWN ERIC XU		PRODUCT NO. ADP-HDMI-FF		
CHECKED		ADP-HDMI-FF		