

USB-A MALE

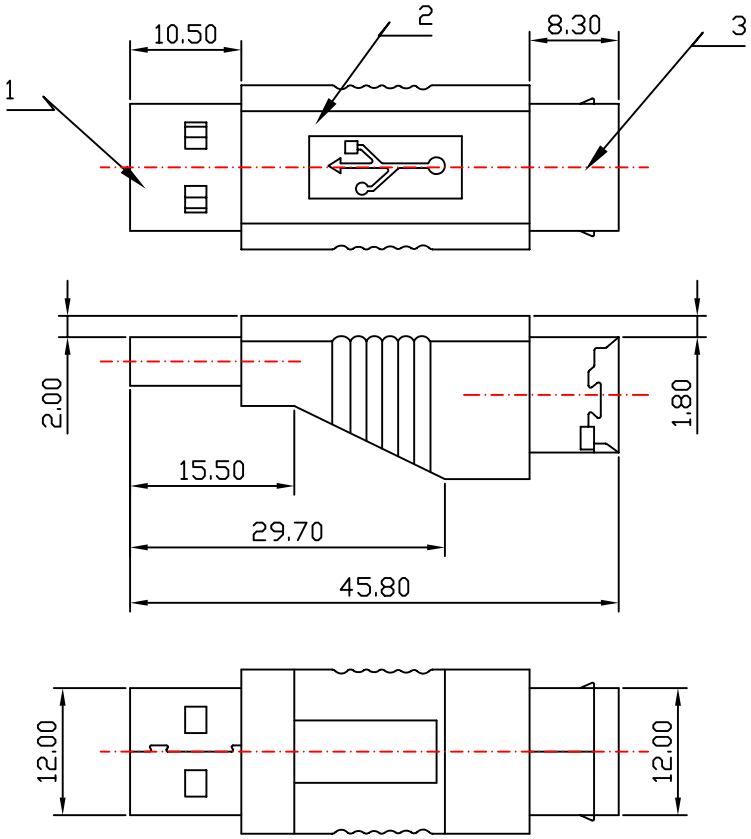



USB-B FEMALE

PIN ASSIGNMENT

	1	2	3	4	SHELL
USB-A MALE					
USB-B FEMALE					

ELECTRONIC TEST:
1. OPEN/SHORT/INTERMITTE: 100%.
2. INSULATION RESISTANCE: 10MΩ.
3. CONTACT RESISTANCE: 5Ω.
4. HI-POT: 300V 10MS

NO.	DESCRIPTION	UNIT	QT'Y
4	INTERNAL WIRES:UL1007 30AWG 7STRAND L:17MM	PCS	4
3	USB-B TYPE FEMALE INSULATION:WHITE IN COLOR	PCS	1
2	PVC MOLDED WITH COPPER FOIL BEIGE IN COLOR		
1	USB-A TYPE MALE INSULATION:WHITE IN COLOR	PCS	1

TOLERANCE			
SELECT		✓	
DIM \ TOL	1	2	3
0.000 +/-	0.02	0.05	0.10
0.00 +/-	0.05	0.10	0.15
0.0 +/-	0.10	0.15	0.20
0 +/-	0.15	0.20	1.00
ANGLE+/-	1.0°	1.0°	1.5°
MATERIAL:			

UNLESS OTHERWISE SPECIFIED TOLERANCE
ANG. ±5°
0. ±0.5
.0 ±0.3
.00 ±0.2

DUN CHENG TECH. CORP.,
TEL:886-2-26739970 FAX:886-2-26739980

SCALE: 1:1	UNIT: mm	DRAWN NAME:	ADP-USB-AMBF
DRAWN MICHAEL	07/03/01		
CHECKED HENRY	07/03/01		
APPROVED JIMMY	07/03/01	PRODUCT NO.	ADP-USB-AMBF
SIZE A4	REV. A	FILE NAME:	ADP-USB-AMBF

REV.	DESCRIPTION	DATE
A ADP-USB-AMBF USB ADAPTER	USB ADAPTER A TYPE MALE TO B TYPE FEMALE MOLDED	07/03/01