

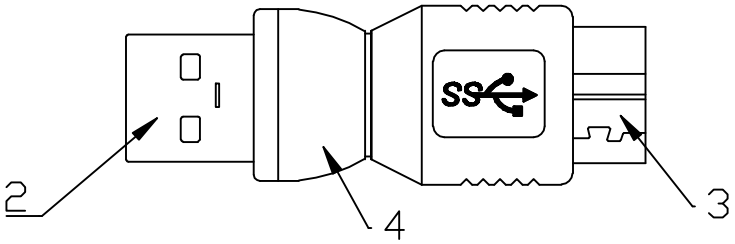



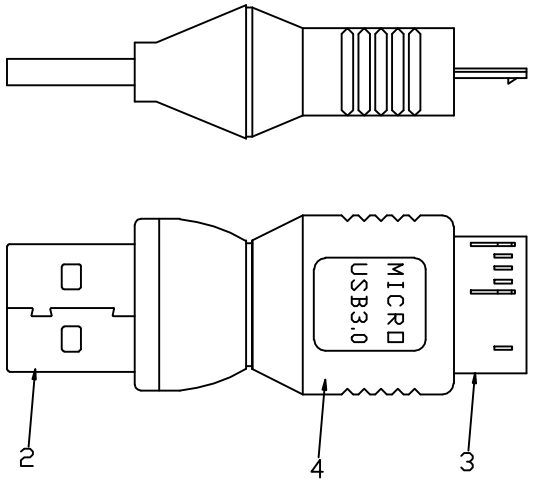

PIN ASSIGNMENT

USB3.0 AM	MCBM
1	1
2	2
3	3
4	5
5	6
6	7
7	8
8	9
9	10
SHELL	SHELL

ELECTRICAL PROPERTIES:

1. 100% OPEN SHORT MIS-WIRE TEST
2. CONTACT RESISTANCE:10OHM.
3. INSULATION RESISTANCE:5MEGA OHM.
4. HIPOT TEST:300V/10MS.

NO.	DESCRIPTION	Q'TY	UNIT
4	55P PVC MOLD BLUE IN COLOR	1	pcs
3	USB3.0 MICRO B TYPE MALE INSULATOR BLACK SHELL PLATED:NICKEL CONTACT:G/F	1	pcs
2	USB3.0 A TYPE MALE INSULATOR BLUE SHELL PLATED:NICKEL CONTACT:G/F	1	pcs
1	INTERNAL WIRES;UL1007 30AWG	10	pcs

REV.	DESCRIPTION	DATE
A		10.01.13

UNLESS OTHERWISE SPECIFIED TOLERANCE
ANG. ±5'
0. ±0.5
.0 ±0.3
.00 ±0.2

SCALE: NONE	UNIT: mm	
DRAWN GUOQING	10.01.13	
CHECKED XING FA	10.01.13	
APPROVED	/ /	
SIZE A4	REV. A	

DUN CHENG TECH. CORP.
TEL:886-2-26739970 FAX:886-2-26739980

DRAWN NAME: ADP-USB3-AM-MBM

PRODUCT NO.

FILE NAME: