


DETAIL "A"
SCALE: 2:1

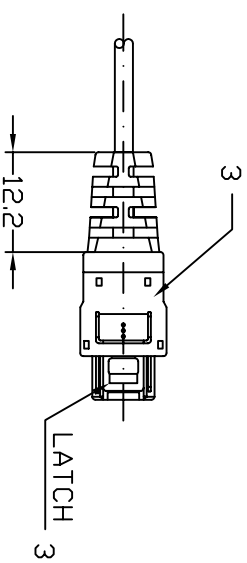

DESCRIPTION

NO.	ITEM	DESCRIPTION	Q'TY
1	CABLE	#26x2C+N/S+JACKET: PVC, OD:φ3.0±0.1MM UL2835 & CSA II A/B. COLOR:BLACK	1PC
2	USB 4POS MALE CONN. ("A" TYPE) (SOLDER TYPE)	CONTACT: 5u" GOLD PLATED INSULATION: WHITE,UL94V-0 SHIELD CASE: NICKEL PLATED COVER: BLACK	1SET
3	SIEMENS C25 12POS. CONN.	HOUSING: P.B.T. BLACK CONTACT: GOLD FLASH, ONLY POS.1~4 COVER: ABS, BLACK LATCH: STAINLESS SUS301	1SET
4	OUTER MOLDED STRAIN RELIEF	PVC, SHORE A=85±3 COLOR: BLACK	7gm 3gm
6	H.S. TUBE	ID=1.0MM, UL224. BLACK L=7.0MM	2PCS

WIRE CONNECTION TABLE

P1"	WIRE COLOR	P2"
1	RED	3
4	BLACK	1
SHELL 2,3	EMPTY	2,4
	NO PIN	5~12

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANG: ±0.5
±0.3
±0.2

SCALE: NONE UNIT: mm

DRAWN Merry_Pang 13/05/03

CHECKED APPROVED



DUN CHENG TECH. CORP.
TEL:886-2-26739970 FAX:886-2-26739980

65126-LED

PRODUCT NO. UX004NX012-S0734

FILE NAME: UX004NX012-S0734

REV.	DESCRIPTION	DATE	SIZE	REV.
A	SIEMENS C25 S25 C351 S351 M351 A35 3508 3518 2588	13/05/03	A4	A