


500±30

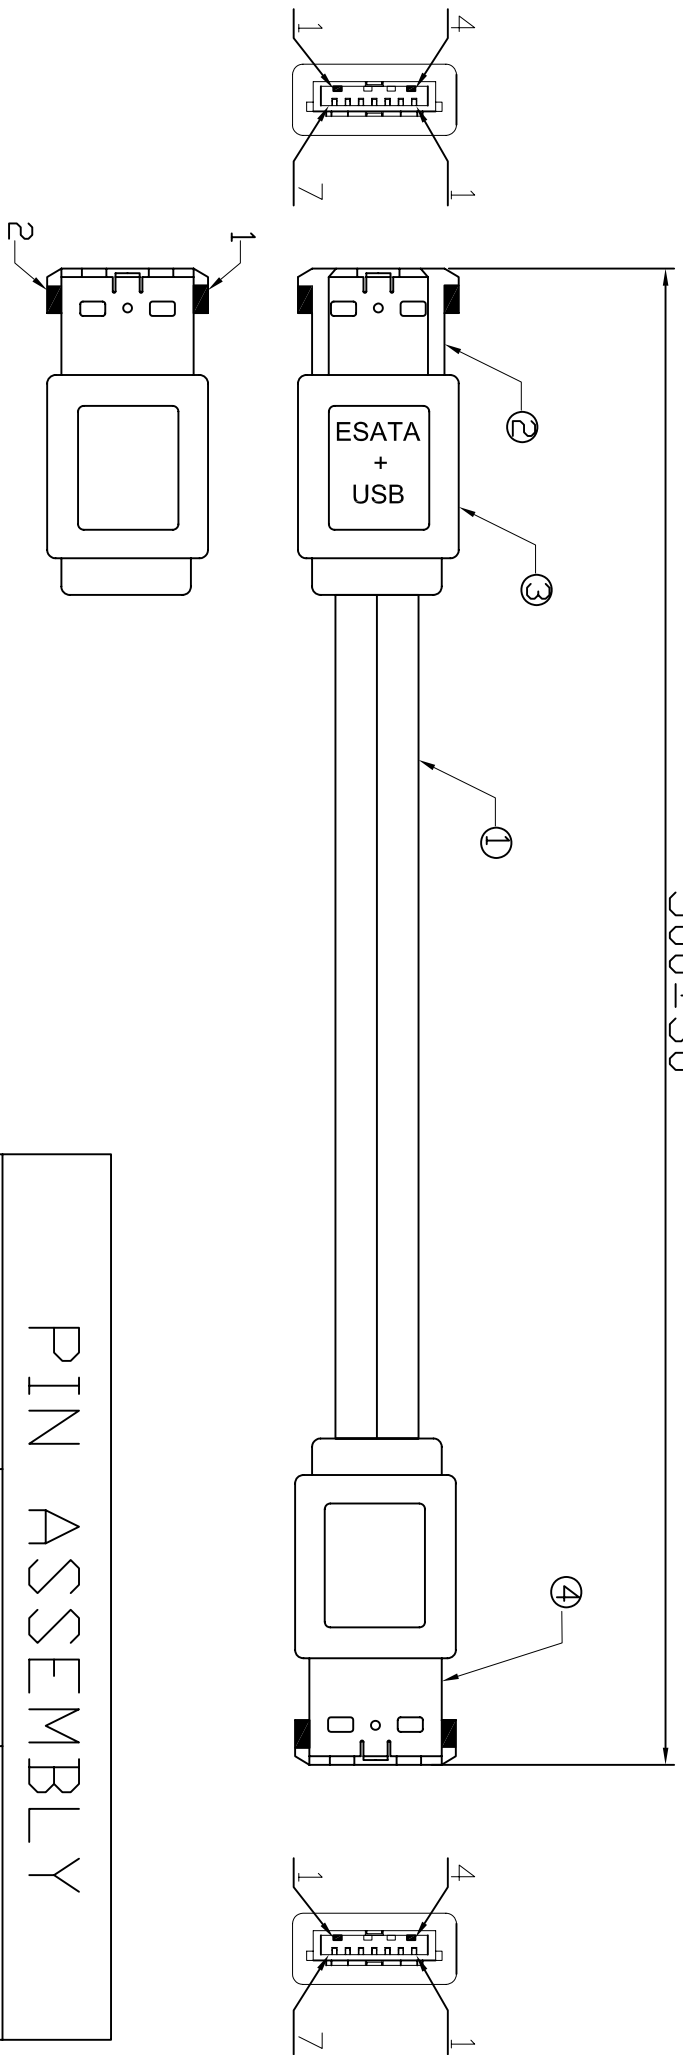

### PIN ASSEMBLY

ESATA+USB	ESATA+USB	ESATA+USB	ESATA+USB	ESATA+USB
1	1	1	1	1
2	2	2	2	12V(+)
3	3	3	3	1
4	4	4	4	12V(-)
5	5	5	5	2
6	6	6	6	2
7	7	7	7	2

ELECTRICAL PROPERTIES:  
 100% OPEN SHORT MIS-WIRE TEST  
 CONTACT RESISTANCE: 10ohm  
 INSULATION RESISTANCE: 5Mega ohm  
 HIPOT TEST: DC 300V/10MS

4	DUAL POWER ESATA+USB CONN SHELL PLATED NICKEL CONTACT:G/F	PCS	1
3	PVC 55P MOLD COLOR: BLACK	PCS	1
2	DUAL POWER ESATA+USB CONN SHELL PLATED NICKEL CONTACT:G/F	PCS	1
1	UL20276<<(26#/2(1P+2E+AL)+MB)*1F+(28#/1+28#/2C+20#/2C+AEB)*1F(Y02-20276-015)	PCS	1
NO.	DESCRIPTION	UNCT	Q'TY

UNLESS OTHERWISE SPECIFIED TOLERANCE  
 ANG. ±0.5  
 0, ±0.3  
 .00 ±0.2

SCALE: 1:1 UNIT: mm

DRAWN Xing Fa DATE: 09/04/30

CHECKED ERIC DATE: 09/04/30

APPROVED

DUN CHENG TECH. CORP.  
 TEL:886-2-26739970 FAX:886-2-26739980

DRAWN NAME: DPW-ESATA-CC-050

PRODUCT NO.

REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME:
A		09/04/30	A4	A	