


HDMI-DVI25-1.3-5	5000±50
HDMI-DVI25-1.3-1.8	1800±30
HDMI-DVI25-1.3-3	3000±50

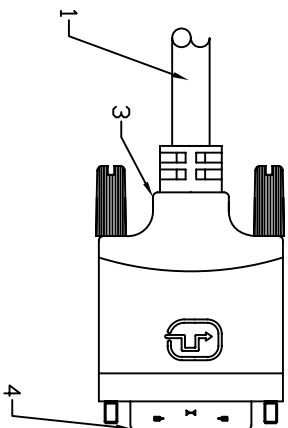

DVI24+1M	HDMI 19P
1	3 <TMDS Data 2->
2	1 <TMDS Data 2+>
3	2 <TMDS Data 2 Shield>
9	6 <TMDS Data 1->
10	4 <TMDS Data 1+>
11	5 <TMDS Data 1 Shield>
17	9 <TMDS Data 0->
18	7 <TMDS Data 0+>
19	8 <TMDS Data 0 Shield>
24	12 <TMDS Clock ->
23	10 <TMDS Clock +>
22	11 <TMDS Clock Shield>
14	18 (+5V Power)
15	17 (Ground)
6	15 (DCC Clock)
7	16 (DCC Data)
16	19 (Hot Plug Detect)
SHELL	SHELL

**ELECTRICAL TEST:**

1. CURRENT RATING: DC 0.5A
2. WITHSTANDING VOLTAGE: DC 300VDC
3. INSULATION RESISTANCE: 50Mohm
4. CONDUCTIVE RESISTANCE: 2ohm

5	CORE:28.5*ø16.0*ø9.5		
4	DVI24+1 MALE SOLDER TYPE SHELL PLATED:GOLD		
3	PVC MOLDED BLACK IN COLDR		
2	HDMI A MALE SOLDER TYPE SHELL PLATED:GOLD	PCS	2
1	HDMI CABLE UL20276 28AWG/4P+28AWG/1P+28AWG/5C+AB JACKET BLACK DD:7.0mm	PC	1
No.	DESCRIPTION	UNIT	Q'TY
B	CABLE HDMI A-TYPE MALE TO DVI 24+1MALE		
REV.	DESCRIPTION	DATE	

UNLESS OTHERWISE SPECIFIED TOLERANCE  
 ANG. 0.0  
 0.0  
 .00  
 SCALE: NONE UNIT: mm  
 DRAWN Xing Fa 07/10/3  
 CHECKED eric 07/10/3

**DUN CHENG TECH. CORP.**  
 TEL:886-2-26739970 FAX:886-2-26739960  
 PRODUCT NO. DVI-HDMI-XX-AL-BK



APPROVED	SIZE A4	REV. B	FILE NAME:
----------	---------	--------	------------