


HDMI-DVI25-1.3-5	5000±50
HDMI-DVI25-1.3-1.8	1800±30
HDMI-DVI25-1.3-3	3000±50

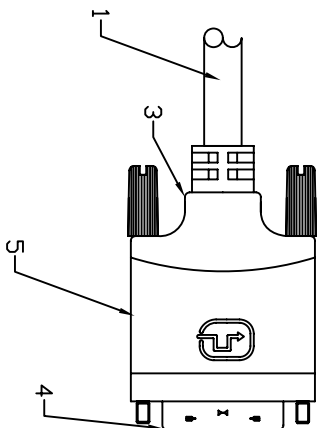

DVI24+1M		HDMI 19P	
1		3	<TMDS Data 2->
2		1	<TMDS Data 2+>
3		2	<TMDS Data 2 Shield>
4		6	<TMDS Data 1->
5		4	<TMDS Data 1+>
6		5	<TMDS Data 1 Shield>
7		9	<TMDS Data 0->
8		7	<TMDS Data 0+>
9		8	<TMDS Data 0 Shield>
10		12	<TMDS Clock ->
11		10	<TMDS Clock +>
12		11	<TMDS Clock Shield>
13		18	<+5V Power>
14		17	<Ground>
15		15	<DCC Clock>
16		16	<DCC Data>
17		19	<Hot Plug Detect>
18			SHELL
19			SHELL

6	CORE:28.5*ø16.0*ø9.5			
5	PVC MOLDED RED IN COLOR			
4	DVI24+1 MALE SOLDER TYPE SHELL PLATED:GOLD			
3	PVC MOLDED BLACK IN COLOR			
2	HDMI A MALE SOLDER TYPE SHELL PLATED:GOLD	PCS		2
1	HDMI CABLE UL20276 28AWG/4P+28AWG/1P+28AWG/5C+AB JACKET BLACK DD:7.0mm	PC		1
No.	DESCRIPTION	UNIT		Q'TY
B	CABLE HDMI A-TYPE MALE TO DVI 24+1MALE			
REV.	DESCRIPTION	DATE		

ELECTRICAL TEST:

1. CURRENT RATING: DC 0.5A
2. WITHSTANDING VOLTAGE: DC 300VDC
3. INSULATION RESISTANCE: 50Mohm
4. CONDUCTIVE RESISTANCE: 2ohm

UNLESS OTHERWISE SPECIFIED TOLERANCE
 ANG. 0.0
 SCALE: NONE
 DRAWN Xing Fd
 CHECKED eric
 APPROVED

UNIT: mm
 DATE: 07/10/3
 SIZE: A4
 REV: B
 FILE NAME:



DUN CHENG TECH. CORP.
 TEL:886-2-26739970 FAX:886-2-26739960

PRODUCT NO.: DVI-HDMI-XX-AL-RD