


ELECTRONIC TEST:  
 1.OPEN/SHORT/INTERMITTE:100%.  
 2.CURRENT RATING:1.5AMP.  
 3.INSULATION RESISTANCE:DC 500V AT 10ms R>50MΩ  
 4.CONTACT RESISTANCE:<1Ω .

6	UL20276 30#*32P+28#*2P+AEB DD:9.8 BLACK IN COLOR	PCS	1
5	PVC MOLDED BLACK IN COLOR		
4	THUMB SCREW #4-40UNC PLATED:NICKEL ABS COLOR:BLACK	PCS	4
3	INNER STEEL SHELL PLATED:TIN	PCS	2
2	ASSY PVC PLASTIC HOOD COLOR:BLACK IN COLOR	PCS	2
1	MD68 MALE SOLDER COLOR BLACK CONTACT GLID FLASH SHELL PLATED:NICKEL	PCS	2
No.	DESCRIPTION	UNIT	Q'TY
A	ROUND CABLE MD68M*2 UL20276		
REV.	DESCRIPTION		



DATE	06/03/16	APPROVED	SIZE	A4	REV.	A	PRODUCT NO.	MD68-MM-L
CHECKED								
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. 0. .00 ±0.5 ±0.3 ±0.2		SCALE: NONE DRAWN: ERIC XU CHECKED:		UNIT: mm DATE: 06/03/16		DUN CHENG TECH. CORP. TEL:886-2-26739970 FAX:886-2-26739980 DRAWN NAME:		

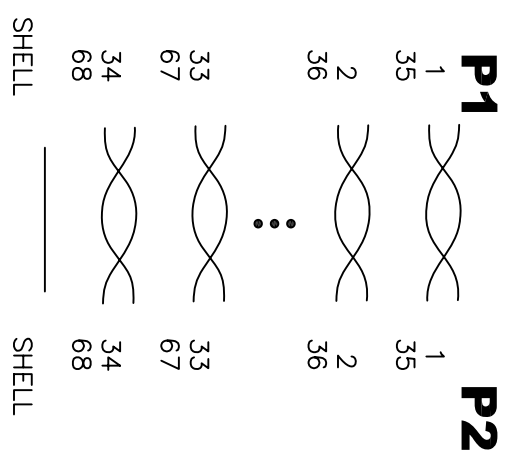