


PIN ASSIGNMENT



- ELECTRICAL TEST:**
- 1.OPEN / SHORT 100% TEST.
 - 2.CONTACT RESISTANCE : 10Ω
 3. INSULATION RESISTANCE : 5MΩ
 - 4.HI-POT : DC 300V /10MS.

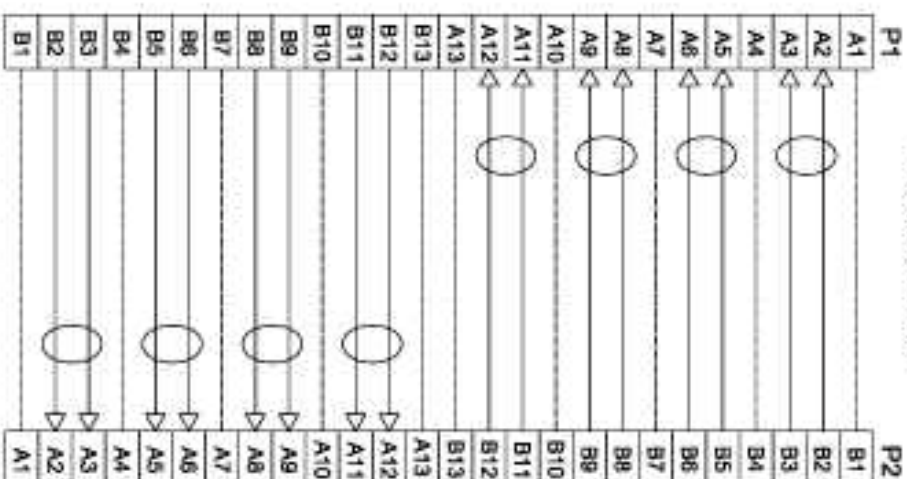

•	4-18-0005-463015	CARTON 48*30*15cm	1/25	PCS
•	4-14-0022-342851	PE BAG 34**28**1.08mm	1/25	PCS
•	4-14-0014-071006	PE BAG 7**10**0.06mm	1	PCS
•	4-18-0003-100001	TIE BK	80	mm
•	4-20-0063-001001	ACETATE TAPE W=10mm BK	35*2	mm
•	4-20-0052-002051	FDL-CU W=20mm(W=20Z)	60*2	mm
•	4-13-0032-M26551	SCREW M2*0.65 NICKEL PLATED	4	PCS
•	3-02-0002-086701	TRL-THERMEL T-967	10	G
•	2-70-0005-011551	EXT MINI SAS 26P ZINE ALLOY 90TOM SHELL NICKEL PLATED WITH LATCH	2	PCS
•	2-70-0002-011551	EXT MINI SAS 26P ZINE ALLOY TOP SHELL NICKEL PLATED	2	PCS
•	2-70-0004-011551	EXT MINI SAS 26P CONNECTOR (MINI SAS 4X)	2	PCS
•	1-57-0001-200201	[26AWG*2P+FILLER+BINDE]+6P*26AWG+BINDER+AL.ML.+BRAID+JACKET(TAMP+HONEL)	1000	mm
NO.	PART NO.	DESCRIPTION	QTY	UNIT

UNLESS OTHERWISE SPECIFIED TOLERANCE
 ANG. 0
 0
 .00

SCALE NONE
 DRAWN XIEBJD
 CHECKED ERIC XU
 APPROVED

DATE 09/02/16
 SIZE A4
 REV. A

UNIT: mm

09/02/16

FILE NAME

DUN CHENG TECH. CORP.
 TEL:886-2-26739970 FAX:886-2-26739980
MS26-MS26-100