


HDMI19F-HDMI19F

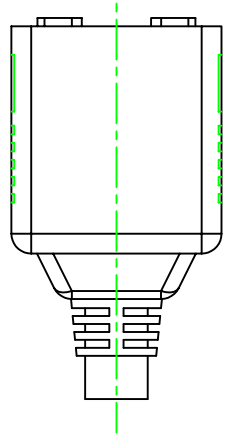

PIN ASSIGNMENT

HDMI 19M      HDMI 19F      HDMI 19F

3	—	3	—	3
1	—	1	—	1
2	—	2	—	2
6	—	6	—	6
4	—	4	—	4
5	—	5	—	5
9	—	9	—	9
7	—	7	—	7
8	—	8	—	8
12	—	12	—	12
10	—	10	—	10
11	—	11	—	11
18	—	18	—	18
17	—	17	—	17
15	—	15	—	15
16	—	16	—	16
19	—	19	—	19
13	—	13	—	13
SHELL	—	SHELL	—	SHELL

ELECTRICAL TEST:

1. CUITTENT RATING: DC 0.5A
2. WITHSTANDING VOLTAGE: DC 300VDC
3. INSULATION RESISTANCE: 50Mohm
4. CONDUCTIVE RESISTANCE: 2ohm

4	UL20276((30AW/G*1P+D+FAM)*4PCS+30AW/G*1P+30AW/G*5C]+AM+D+B	PCS	1
3	HDMI A MALE SOLDER TYPE CONTACT PLATED: GOLD	PCS	1
2	PVC MOLDED BLACK IN COLDR		
1	HDMI 19P FEMALE PLATED: GOLD	PCS	2
No.	DESCRIPTION	UNIT	Q'TY
A			
REV.	DESCRIPTION	DATE	SIZE

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0	±0.5
0	±0.3
.00	±0.2
SCALE:	NONE
DRAWN	ERIC XU
CHECKED	
APPROVED	


**DUN CHENG TECH CORP.**  
 TEL:886-2-26739970 FAX:886-2-26739980  
 DRAWN NAME: SPL-H19M-FX2-1FT