


1000±30

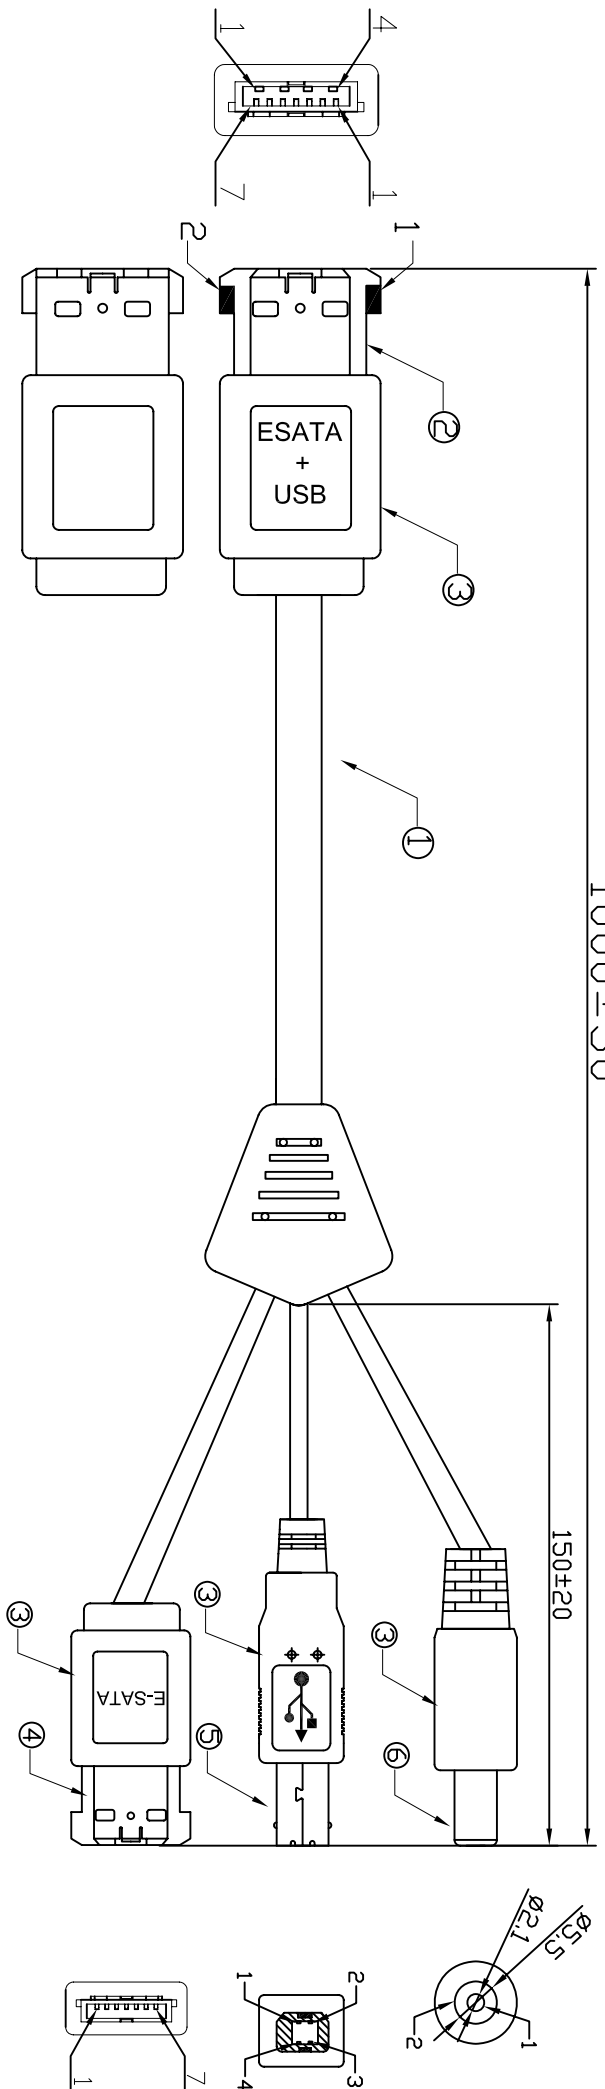

ELECTRICAL PROPERTIES:

100% OPEN SHORT MIS-WIRE TEST
 CONTACT RESISTANCE: 100ohm
 INSULATION RESISTANCE: 5Mega ohm
 HIPDT TEST: DC 300V/10MS

PIN ASSEMBLY

ESATA+USB	ESATA	ESATA+USB	USB AM	ESATA+USB	DC
1	1	1	1	1	1
2	2	2	2	2	1
3	3	3	3	3	2
4	4	4	4	4	2
5	5	5	5	5	
6	6	6	6	6	
7	7	7	7	7	

6	DC 5.5*2.1 TYPE MALE SHELL PLATED NICKEL	PCS	1
5	USB B TYPE MALE CONN SHELL PLATED NICKEL	PCS	1
4	ESATA 7P CONN CABLE SIDE SHELL PLATED NICKEL CONTACT:G/F	PCS	1
3	PVC MOLD COLOR: BLACK	PCS	1
2	Dualpower ESATA CONN SHELL PLATED NICKEL CONTACT:G/F	PCS	1
1	UL20276<<(26#/2KIP+2E+AL)+MB>*1F+(28#/1+28#/2C+20#/2C+AEB)*1F(Y02-20276-015)	PCS	1
ND.	DESCRIPTION	UNCT	Q'TY

UNLESS OTHERWISE SPECIFIED TOLERANCE
 ANG. ±0.5
 0.0 ±0.3
 .00 ±0.2

SCALE: 1:1 UNIT: mm

DRAWN Xing Fa DATE: 09/05/11

CHECKED eric DATE: 09/05/11

APPROVED

DUN CHENG TECH. CORP.
 TEL:886-2-26738970 FAX:886-2-26738980

DRAWN NAME: USB-12V-ESATA-1M

PRODUCT NO.

DATE: 09/05/11

DESCRIPTION

REV. A

SIZE A4

REV. A

FILE NAME: