

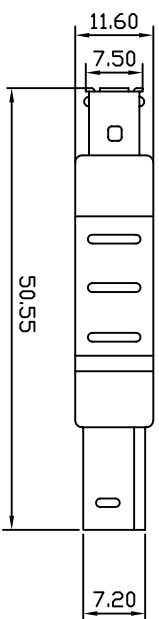



USB-A FEMALE

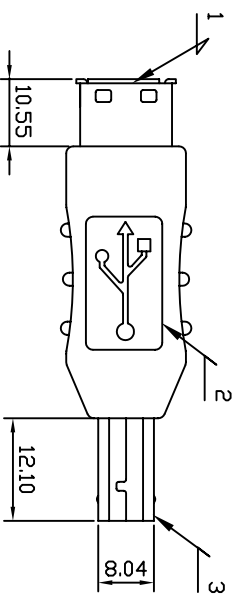

USB-B MALE

PIN ASSIGNMENT

AF BM COLOR

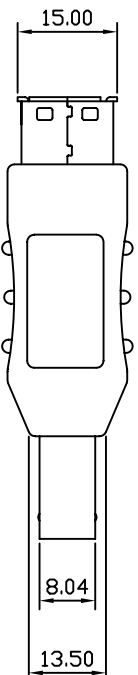

LED: RED/YELLOW/GREEN/BLUE/WHITE

ELECTRONIC TEST:

- 1.OPEN/SHORT/INTERMITTE:100%.
- 2.INSULATION RESISTANCE:10MΩ.
- 3.CONTACT RESISTANCE:100Ω.

SHELL SHELL BRAID

4	INTERNAL WIRES:UL1007 30AWG 7STRAND L:17MM	PCS	4
3	USB-B TYPE MALE INSULATION:WHITE IN COLOR	PCS	1
2	PVC MOLDED WITH TRANSPARENT IN COLOR		
1	USB-A TYPE FEMALE INSULATION:WHITE IN COLOR	PCS	1
NO.	DESCRIPTION	UNIT	QTY

TOLERANCE

SELECT	1	2	3
DN/TOL	1	2	3
0.000 +/-	0.02	0.05	0.10
0.00 +/-	0.05	0.10	0.15
0.0 +/-	0.10	0.15	0.20
0 +/-	0.15	0.20	0.30
ANGLE/1°	10'	10'	15'
MATERIAL			



DUN CHENG TECH. CORP.
TEL:886-2-26739970 FAX:886-2-26739980

SCALE: 1:1
DRAWN: MICHAEL 07/03/01
CHECKED: HENRY 07/03/01

UNIT: mm
DRAWN NAME: ADP-USB-AFBM-LED

A ADP-USB-AFBM-LED USB LIGHT ADAPTER USB ADAPTER A TYPE FEMALE TO B TYPE MALE MOLDED 07/03/01

REV. DESCRIPTION DATE SIZE REV. A FILE NAME: ADP-USB-AFBM-LED

APPROVED: JIMMY 07/03/01

PRODUCT NO: ADP-USB-AFBM-LED

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANG: ±0.5
0.0 ±0.2

SIZE: A4