
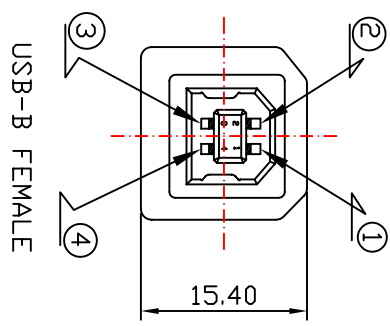


USB-A MALE

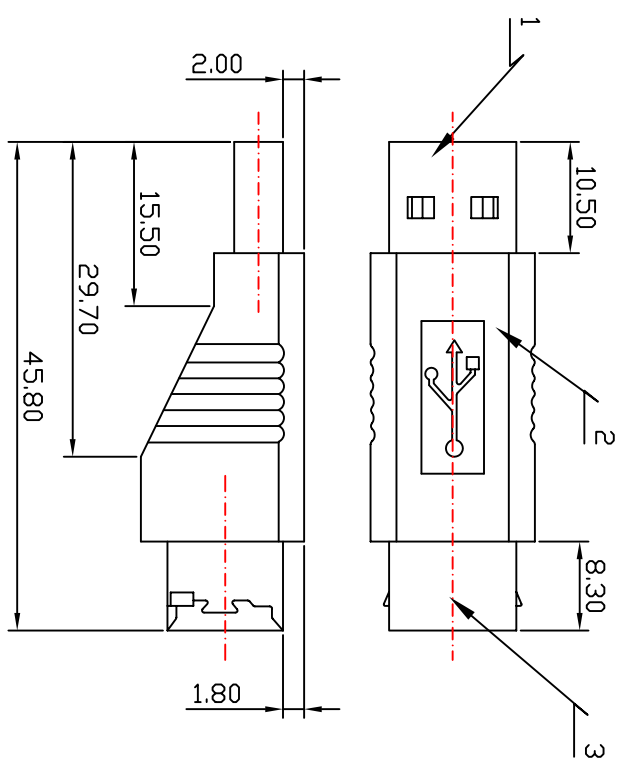

USB-B FEMALE

PIN ASSIGNMENT

USB-A MALE	1	2	3	4	SHELL
USB-B FEMALE	1	2	3	4	SHELL


4	INTERNAL WIRES:UL1007 30AWG 7STRAND L:17MM	PCS	4
3	USB-B TYPE FEMALE INSULATION:WHITE IN COLOR	PCS	1
2	PVC MOLDED WITH COPPER FOIL BEIGE IN COLOR		
1	USB-A TYPE MALE INSULATION:WHITE IN COLOR	PCS	1
NO.	DESCRIPTION	UNIT	QTY

TOLERANCE		SELECT	✓	
DN	TOL	1	2	3
0.00	+/- .002	0.05	0.10	
0.00	+/- .005	0.10	0.15	
0.0	+/- .010	0.15	0.20	
0	+/- .015	0.20	0.30	
	ANGLE: 10°	10°	15°	

ELECTRONIC TEST:
 1.OPEN/SHORT/INTERMITTE:100%.
 2.INSULATION RESISTANCE:10MΩ.
 3.CONTACT RESISTANCE:5Ω.
 4.HI-POT:300V 10MS

UNLESS OTHERWISE SPECIFIED TOLERANCE
 ANG: F0.5
 0, ±0.3
 .00 ±0.2

SCALE: 1:1 UNIT: mm
 DRAWN MICHAEL 07/03/01
 CHECKED HENRY 07/03/01
 APPROVED JIMMY 07/03/01



DUN CHENG TECH. CORP.
 TEL:886-2-26739970 FAX:886-2-26739980

A	ADP-USB-AMBF	USB ADAPTER	USB ADAPTER A TYPE MALE TO B TYPE FEMALE MOLDED	07/03/01		REV. A	FILE NAME: ADP-USB-AMBF
---	--------------	-------------	-------------------------------------------------	----------	--	--------	-------------------------