


1830±30

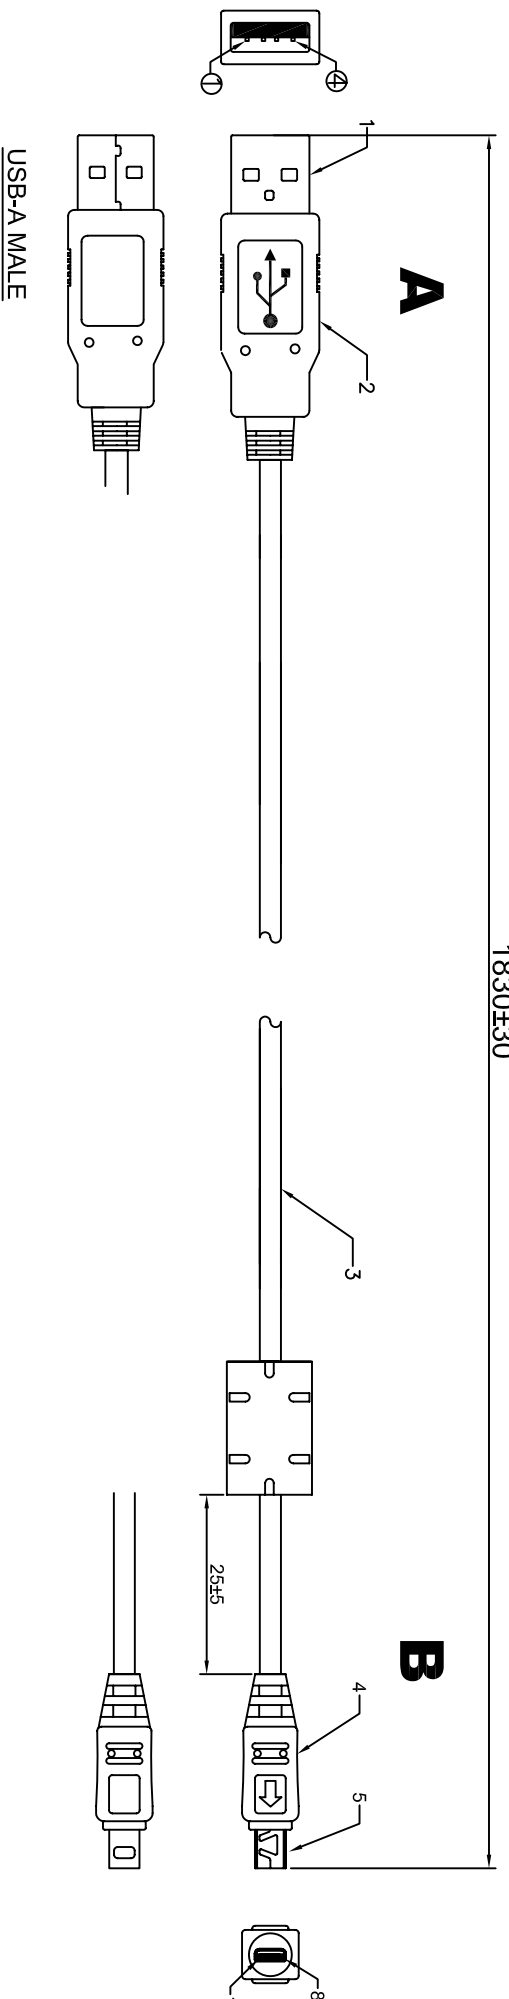


Pin Assembly

- | | | | |
|----------|-------|----------|-------|
| A | _____ | B | _____ |
| 1 | _____ | 4 | _____ |
| 2 | _____ | 3 | _____ |
| 3 | _____ | 2 | _____ |
| 4 | _____ | 1 | _____ |
| G | _____ | G | _____ |

ELECTRONIC TEST:

1. OPEN/SHORT/INTERMITTE:100%.
2. INSULATION RESISTANCE:DC 250V AT 10ms R>10M Ω
3. CONTACT RESISTANCE:<5Ω.

6			
5	MINI USB 8 PIN MALE SINGLE ROW G/F(Samsung)	1	PCS
4	PVC MOLDED BLACK IN COLOR		
3	UL2725 28#*1P+28AWG*2C+ADB REV:2.0 BLACK IN COLOR OD:3.5mm	1	PCS
2	PVC MOLDED BLACK IN COLOR	1	PCS
1	USB A TYPE MALE SOLDER TYPE CONNECTOR INSULATOR WHITE COLOR	1	PCS
NO	DESCRIPTION	Q'TY	UNITS
A			
REV.	DESCRIPTION	DATE	

06/02/10	APPROVED	SIZE A4	REV. A	PRODUCT NO.
UNLESS OTHERWISE SPECIFIED TOLERANCE	ANG:	E±5	MM	<p>DUN CHENG TECH. CORP. TEL:886-2-26739970 FAX:886-2-26739980</p> 
0.0	F±0.5			
.00	F±0.2			
SCALE: NONE	UNIT: mm			
DRAWN ERIC XU	06/02/10			USB2-SAMSUNG-183-C
CHECKED				
APPROVED				